
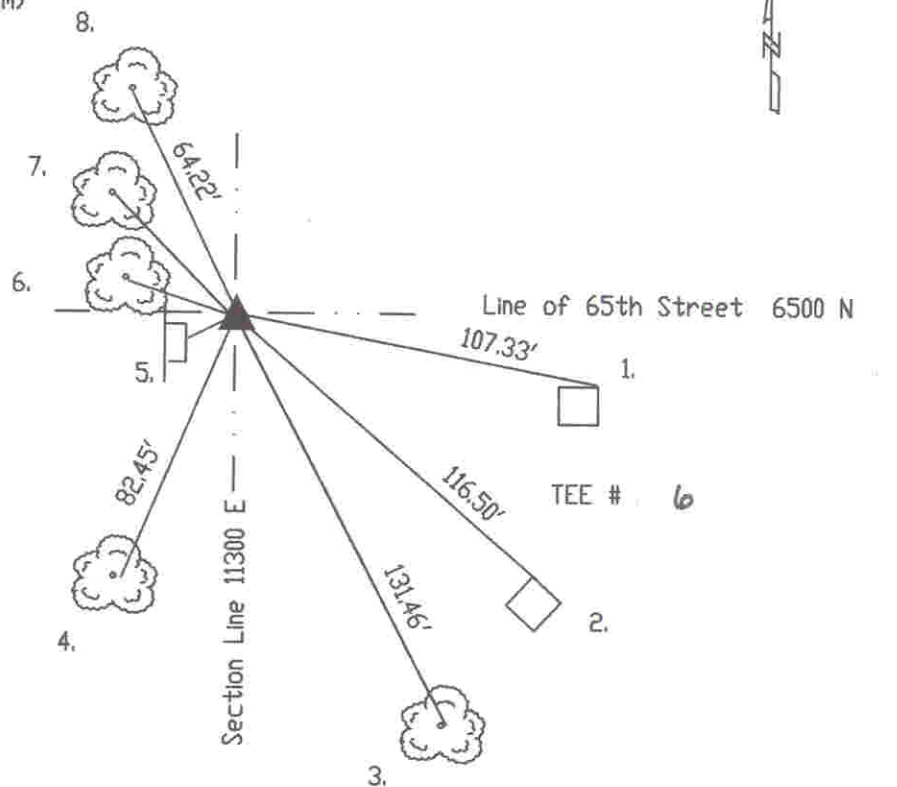


OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER
SECTION 33 TOWNSHIP 17 RANGE 5
DATE: 12-10-99 8-24-06
PARTY CHIEF: Kiste
CREW: _____
TYPE OF MARKER: Harrison
METHOD OF ESTABLISHMENT: County: 2-24-94

IN. S.P.C. E ZONE, NAD 83
NAME: 17053305
N: 513873.3715(m)
E: 74339.1015(m)

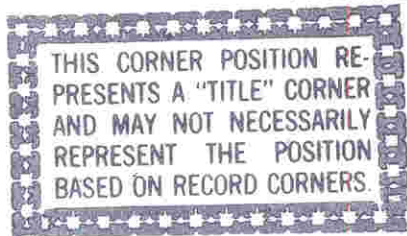

Fatout 3-29-1880 called following witnesses: 20" beech S 44 3/4 W 44 links, 10" sugar N 47 1/2 E 33 1/4 links per Lawrence Township Legal Survey Book pg.40. Schneider survey 6-1979 called stone at intersection of fence. Schneider 11-6-90 called stone with cut 'x' found. Benchmark Surveying 8-29-91 called stone found. All distances measured in these surveys agree within 3 tenths. 2-24-94 Wilcoxon found stone with cut 'x' 4" down. Stone had been disturbed. Harrison set at calculated location determined by above surveys. Re-tied 12-13-99 by Kiste.

HC753305

REF.	DISTANCE	DESCRIPTION
1.	107.33'	NE corner of "TORD" metal sprinkler control box
2.	116.50'	Northerly corner cut stone TEE # 6 marker
3.	131.46'	PK nail w/shiner NE side 18" hickory 12"up
4.	82.45'	PK nail w/shiner E 12" ash 8"up
5.	9.25'	MCSO sign post
6.	18.43'	PK nail w/shiner S 10" cherry 40"up
7.	36.10'	PK nail SE white walnut 36"up
8.	64.22'	Mag nail w/washer W 8" buckeye 15"up